


Wallbox - WA



Four types of plugs are available.



Meet IEC 61851, Type B AC 30mA DC 6mA

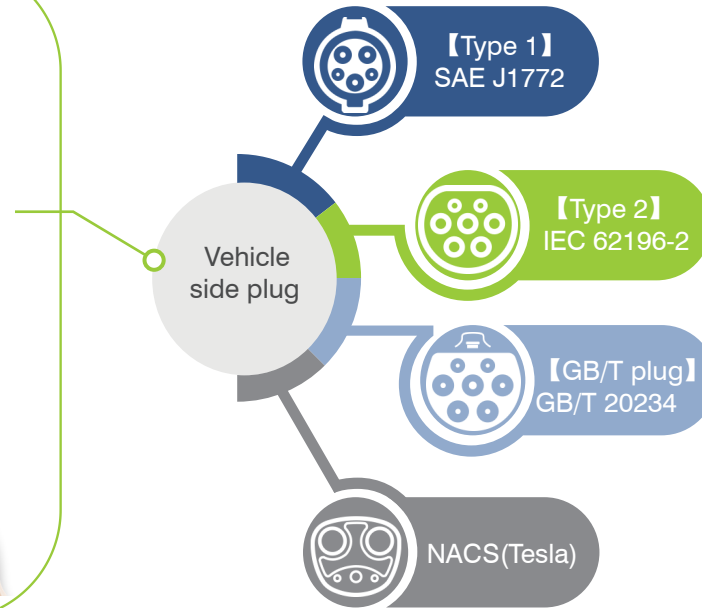

Electronic Data

Input / Output Voltage	110V / 230V / 380V AC
Current	16A, 32A
Power	7.4kW, 11kW, 22kW
Frequency	50Hz / 60Hz
Charging connector	Type 1 / Type2 / GB/T 20234 / NACS(Tesla)
Cable length	5m TPU cable / customized

Fuction

WiFi + Bluetooth	Support APP
RFID Card	Yes
APP	√
OCPP 1.6	Optional
4G	Optional
Ethernet	Optional
Modbus	Optional
Load Balancing	Optional
PEN Functuin	Optional

Working environment

Safety	12 safety protections built in
RDC	Type B, AC 30mA + DC 6mA
IP Grade	IP65
Environment	-30°C~+50°C

Guarantee

Warranty	12 months
Certificate	TUV CE

Packing

Dimension	56*48*24cm, 2pcs / carton
Holders	including free holders

PRODUCT DETAILS

Version- WA

01

Controlled by APP




Adjustable Charging Current:

6A-16A 6A-32

Schedule charging
charge from fixed time every day

02

Comprehensive EV charging solutions

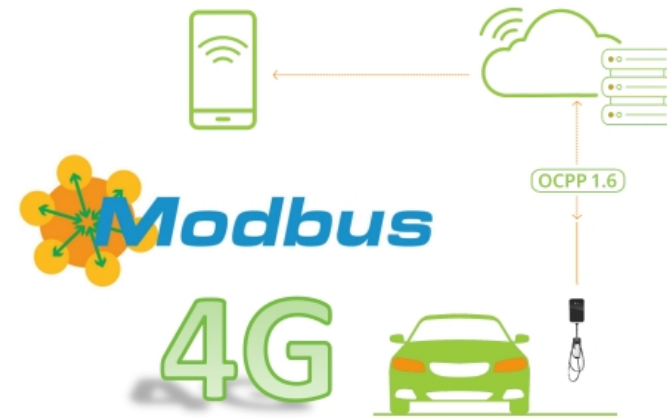

OCPP 1.6, Ethernet, Modbus, 4G, Load Balancing are optional

03

12 Safety Protections

